

# **WWATTS®**

## **Watts Ball Valves**

Code# Description	Size	Mfg#	Box Qty
-------------------	------	------	---------

#### 2-Piece, Standard Port, Bronze Ball Valves

ROBERTS-HAMILTON CO.

Series B6000, B6001 2-Piece, Standard Port, Bronze Ball Valves are used in commercial and industrial applications for a full range of liquids and gases. It features a blowout proof pressure retaining stem. The B6000, B6001's standard port orifice ensures minimal pressure drop, while Durafill and Uniseal seats and chrome plated brass ball provide lasting service. Model B6000 has threaded NPT end connections and Model B6001 has solder end connections. Pressure Rating: For 1/4 to 3 in. - 600psi WOG (non-shock); 150psi WSP; For 4 in. - 400psi WOG (non-shock); 125psi WSP.

#### B6000 - Green Handle

		29-0500	Ball Valve 150 IP	1/4	B6000	12	
		29-0505	Ball Valve 150 IP	3/8	B6000	12	
		29-0510	Ball Valve 150 IP	1/2	B6000	10	
		29-0515	Ball Valve 150 IP	3/4	B6000	10	
		29-0520	Ball Valve 150 IP	1	B6000	6	
		29-0525	Ball Valve 150 IP	1-1/4	B6000	2	
	*	29-0530	Ball Valve 150 IP	1-1/2	B6000	2	
		29-0535	Ball Valve 150 IP	2	B6000	1	
	*	29-0537	Ball Valve 150 IP	2-1/2	B6000	1	
		29-0540	Ball Valve 150 IP	3	B6000	1	
	B6001 - Green Handle						
		29-0610	Ball Valve 150 CC	1/2	B6001	10	
1							

	29-0610	Ball Valve 150 CC	1/2	B6001	10
	29-0615	Ball Valve 150 CC	3/4	B6001	10
	29-0620	Ball Valve 150 CC	1	B6001	4
*	29-0625	Ball Valve 150 CC	1-1/4	B6001	2
*	29-0630	Ball Valve 150 CC	1-1/2	B6001	2
*	29-0635	Ball Valve 150 CC	2	B6001	1

### 2-Piece, Full Port, Bronze Ball Valves

Series B6080, B6081 2-Piece, Full Port, Bronze Ball Valves are used in commercial and industrial applications for a full range of liquids and gases. It features virgin PTFE seats and seals. The B6080, B6081's full port orifice ensures minimal pressure drop, while virgin PTFE stem packing seal & thrust washer and chrome plated brass ball provide lasting service. Model B6080 has threaded NPT end connections and Model B6081 has solder end connections. Pressure Rating: 600psi WOG (non-shock) and 150psi WSP.

#### B6080 - Green Handle

*	29-0710	Ball Valve 600WOG IP	1/2	B6080	10
*	29-0712	Ball Valve 600WOG IP	3/4	B6080	10
*	29-0714	Ball Valve 600WOG IP	1	B6080	4
*	29-0716	Ball Valve 600WOG IP	1-1/4	B6080	2
*	29-0718	Ball Valve 600WOG IP	1-1/2	B6080	2
*	29-0720	Ball Valve 600WOG IP	2	B6080	1

#### B6081 - Green Handle

	29-0730	Ball Valve 600WOG CC	1/2	B6081	10
	29-0732	Ball Valve 600WOG CC	3/4	B6081	10
*	29-0734	Ball Valve 600WOG CC	1	B6081	4
*	29-0736	Ball Valve 600WOG CC	1-1/4	B6081	2
*	29-0738	Ball Valve 600WOG CC	1-1/2	B6081	2

\* Stocked Locally







B6001



B6080



B6081









B6301

#### 2-Piece, Full Port, Bronze Ball & Waste Valves

ROBERTS-HAMILTON CO.

Series B6300, B6301 2-Piece, Full Port, Bronze Ball & Waste Ball Valves are used in commercial, and industrial applications. It features a drain port to allow for draining or venting of downstream line when valve is in the off position. The B6300, B6301's full port orifice ensures minimal pressure drop, while virgin PTFE seats and chrome plated brass ball provide lasting service. Model B6300 has threaded NPT end connections and Model B6301 has solder end connections. Pressure Rating: 400psi WOG (non-shock). Not suitable for steam or compressed gas.


#### B6300 - Green Handle

*	29-0790	Ball Valve 400CWP IP	3/4	B6300	8		
B6301 - Green Handle							
	29-0800	Ball Valve 400CWP CC	3/4	B6301	8		
*	29-0802	Ball Valve 400CWP CC	1	B6301	8		

#### 2-Piece, Full Port, Brass Ball Valves

Series FBV-3C, FBVS-3C 2-Piece, Full Port, Brass Ball Valves are used in commercial and industrial applications for a full range of liquids and gases. They feature a bottom-loaded blowout-proof stem, virgin PTFE seats, thrust washer, and adjustable stem packing gland, stem packing nut, chrome plated brass ball, brass adapter, and steel handle. Model FBV-3C has threaded end connections. Model FBV-3C-TH has tee handle with threaded connections. Model FBVS-3C has solder end connections. Model FBVS-3C-TH has tee handle with solder connections. Pressure Rating: For 1/4 to 2 in. - 600psi WOG: 150psi WSP; For 2 1/2 to 4 in. - 400psi WOG; 125psi WSP.

#### FBV3C - Yellow Handle

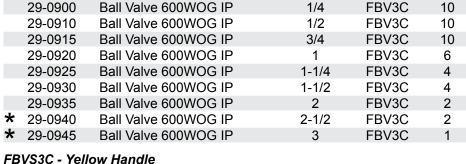

	29-0960	Ball Valve 600WOG CC	1/2	FBVS3C	10
	29-0965	Ball Valve 600WOG CC	3/4	FBVS3C	10
	29-0975	Ball Valve 600WOG CC	1	FBVS3C	6
	29-0980	Ball Valve 600WOG CC	1-1/4	FBVS3C	4
	29-0985	Ball Valve 600WOG CC	1-1/2	FBVS3C	4
	29-0990	Ball Valve 600WOG CC	2	FBVS3C	2
*	29-0995	Ball Valve 600WOG CC	2-1/2	FBVS3C	2
*	29-1000	Ball Valve 600WOG CC	3	FBVS3C	1





FBV3C



FBVS-3C